

PAVIGYM MOTION



PAVIGYM
WENGUE



PAVIGYM
BEECHWOOD



PAVIGYM
STONE GREY.



PAVIGYM
B. MARBLE



PAVIGYM
JET BLACK

Special items on request:
min. quantities of 70m2.

SPECIAL COLOURS



PAVIGYM
CYAN



PAVIGYM
LIME



PAVIGYM
RED



PAVIGYM
WALNUT.



THE UNIQUE SOLUTION FOR AEROBIC & GROUP-X AREAS.

AN INDUSTRY FIRST: ONE FLOORING THAT MEETS ALL REQUIREMENTS.

- REDUCE INJURIES.
- SHOCK ABSORTION & POINT ELASTICITY.
- FRICTION SPECIALLY FOR GROUP-X.
- AVOID MARKS ON THE FLOOR.


TECHNICAL INFO.

WEIGHT		7 kg
DENSITY	UNE-53526	860 kg/m
HARDNESS	DIN 53505	75° Sh A
WATER ABSORPTION	ASTM D570	0%
COEFF. OF LINEAR DILATATION	0°C-40°C	1,5 10 ⁻⁴ °C ⁻¹
FIRE REACTION	EN 13501-1	Cfl-s2
ABRASION RESISTANCE	EN-5470	614 mg
SHOCK ABSORBANCE	EN 14808	30%
COEFFICIENT OF FRICTION	EN 13036	95

INTERLOCKING SYSTEM



9 mm THICKNESS

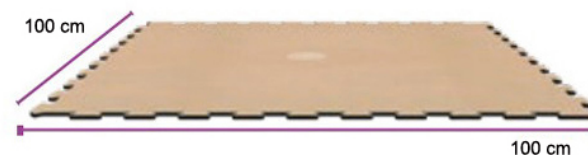

COMPARATIVE CHART.

	PAVIGYM MOTION	WOODEN SPRING	LINOLEUM (PVC)
COMFORT AND WELLNESS	*****	***	***
SHOCK ABSORPTION	****	**	****
MOVEMENT PROTECTION (SLIP/BLOCKING)	****	***	***
SOUND INSULATION	****	**	***
THERMAL INSULATION	****	****	****
DURABILITY	*****	***	**
WATER RESISTANCE	*****	**	****
EASINESS AND SHORT INSTALLATION TIME	*****	**	***
DAMAGED AREA REPLACEMENT (MODULARITY)	*****	*	*



AEROBIC



STEP



BODYJUMP™



BODYPUMP™